



# Air Nipper



ST-66710 *Industrial*  
Air Nipper W/Blade (B-S10)

ST-6672  
Air Nipper W/Blade (B-S20)

ST-6673  
Air Nipper W/Blade (B-S30)

ST-66711 *Industrial*  
Air Nipper W/Blade (B-S40)

ST-66712 *Industrial*  
Air Nipper W/Blade (B-S40)

ST-66713 *Industrial*  
Air Nipper W/Blade (B-AR20-1)

ST-66715 *Industrial*  
Air Nipper W/Blade (B-AR30-2)

ST-66714 *Industrial*  
Air Nipper W/Blade (B-S50)

ST-66716 *Industrial*  
Air Nipper W/Blade (B-S40)

ST-66717 *Industrial*  
Air Nipper W/Blade (B-A20-2)

## Specification:

Recommend Air Pressure: 6.3 kg/cm<sup>2</sup> (90psi)

Model No.	Cutting Capacity (φ) mm			Grip Size (φ)mm	Pressure Power Kg/cm <sup>2</sup>	Avg.Air Cons. cm <sup>3</sup> /cycle	Overall Length		Net weight		Packing Pcs/Ctn/G.W/Cuft
	Copper	Steel	Plastic				mm	in	Kgs	Lbs	
ST-6672	1.0	0.5	2.0	30	40	64	120	4.7	0.13	0.29	25/Ctn/6/0.36'
ST-6673	1.5	1.0	4.0	36	60	116	136	5.35	0.2	0.44	25/Ctn/7/0.36'
ST-66710	0.8	0.5	-	20	27	35	126	5	0.08	0.18	28/Ctn/5.83/0.6'
ST-66711	2.6	2.0	5	45	140	230	170	6.7	0.34	0.75	35/Ctn/21.7/1.9'
ST-66712	2.6	2.0	5	45	250	508	242	9.5	0.52	1.15	21/Ctn/16.6/1.7'
ST-66713	3.3	2.8	-	45	280	508	268	10.5	0.55	1.21	21/Ctn/19.8/1.7'
ST-66714	3.3	2.8	6.5	56	280	584	207	8.1	0.57	1.25	20/Ctn/29.2/1.7'
ST-66715	4.8	4.0	6.5	56	450	956	300	11.8	0.90	1.98	20/Ctn/29.2/1.7'
ST-66716	2.6	2.0	4	45	140	230	161	1.7	0.35	0.77	35/Ctn/22/1.9'
ST-66717	3.3	2.8	6.5	56	280	584	200	7.8	0.59	1.3	20/Ctn/21.8/1.0'

\*Separate Blades are available.




# Blade for Air Nipper



## S Series:




Model	Capacity(mm)		Body Model	A	B	C
	Copper Wire	Iron Wire				
B-S10	0.8	0.5	ST-66710	11	6.9	2.9
B-S20	1.1	0.5	ST-6672	11	6.9	3
B-S30	1.6	1.0	ST-6673	13.5	9.6	6
B-S40	2.6	2.2	ST-66711 · ST-66716	19	11.8	7.5
	3.0	2.4	ST-66712			
B-S50	3.3	2.8	ST-66714 · ST66717	24	17	8.5
	Stainless steel : 2.0					
	Piano wire : 1.2					
	4.8	4	ST-66715			
	Stainless Steel : 2.8					



## FD Series:




Model	Capacity(mm) (Plastics)		Body Model	A	B	C	D
	Soft	Hard					
B-FD10	5	4	ST-66711 · ST-66716	11	11.8	7.5	42°
	7	4	ST-66712				
B-FD20	10	6.5	ST-66714 · ST66717	14	17	11	30°
	13	6.5	ST-66715				




## CL Series:

Model	Capacity(mm)	Body Model
B-CL10	11.0	ST-66711 · ST-66712 · ST-66716
B-CL20	14.3	
B-CL30	15.9	
B-CL40	19.0	ST-66714 · ST66715 · ST-66717




## A Series

Model	Capacity	Body Model	A	B
B-A10	1.25sq	ST-66711 · ST-66712 · ST-66716	11	5.7
B-A30-1	1.25sq	ST-66713	11.5	6.5
B-A20-1	1.25sq			
B-A20-2	2.0sq	ST-66714 · ST-66715 · ST-66717	11.5	6.5
B-A20-3	5.5sq			
B-A40-1	1.25~2.0sq			
B-A40-2	2.0~5.5sq	ST-66715	20	6
B-A50	1.25~2.0~5.5sq		20	6
B-A60	8.0sq	ST-66715	28	6
			11.5	6.5

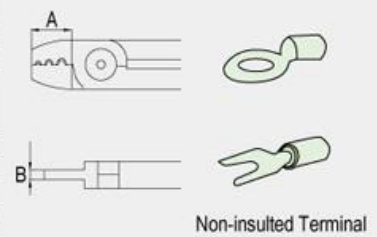

## AR Series

Model	Capacity	Body Model	A	B
B-AR20-1	1.25sq	ST-66713	17	6.5
B-AR30-1	1.25sq			
B-AR30-2	2.0sq			
B-AR30-3	5.5sq	ST-66714 · ST-66715 · ST-66717	17	6
B-AR40-1	1.25~2.0sq			
B-AR40-2	2.0~5.5sq			
B-AR50	8.0sq			
			17	6

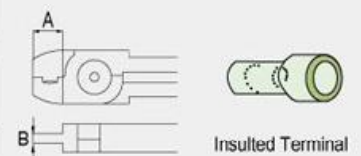

## Others

Model	Capacity	Body Model
B-R10	8mm	ST-66711 · ST-66712 · ST-66716
B-R20	8mm	
B-R30	10mm	
B-R40	-	

